
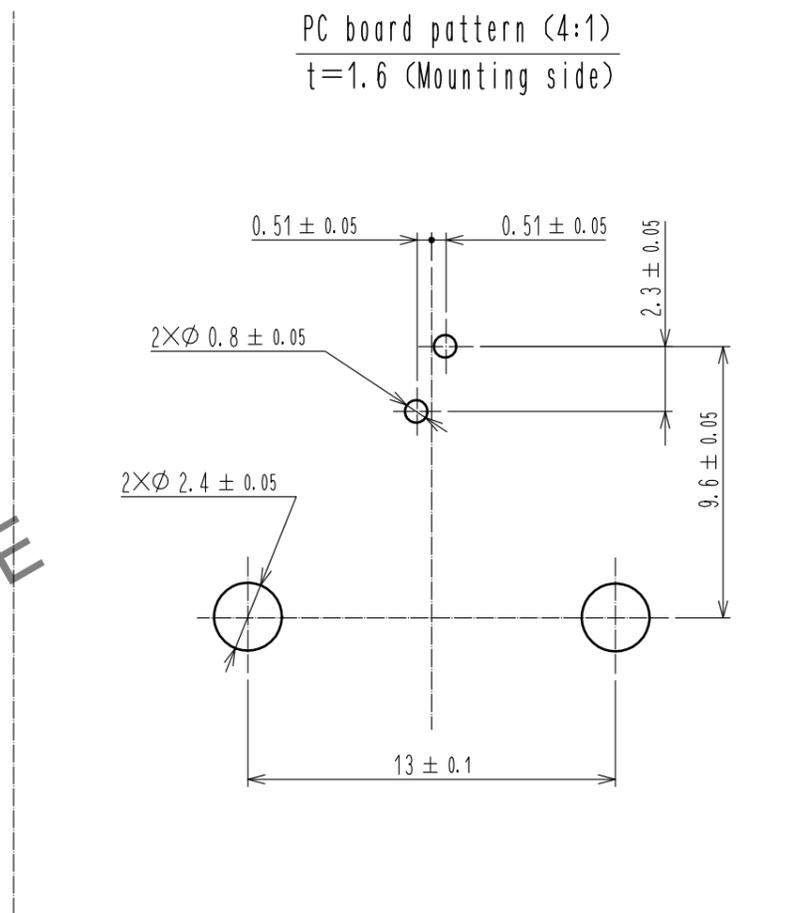
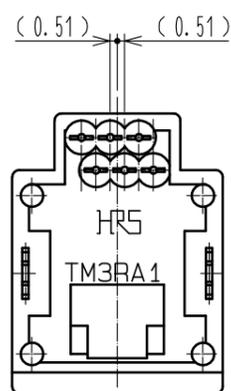
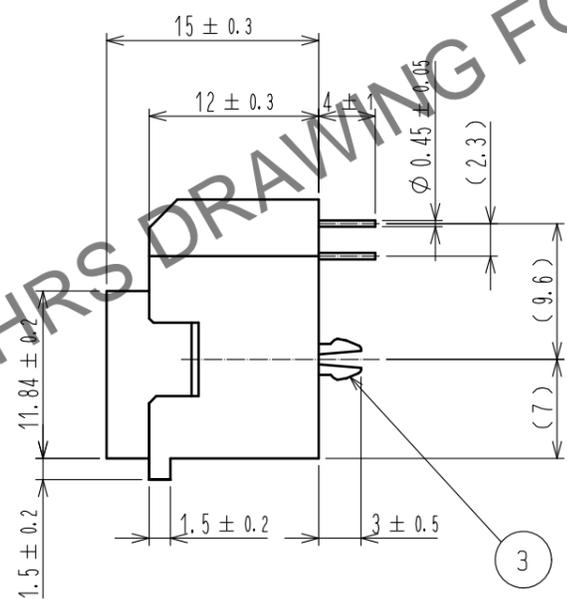
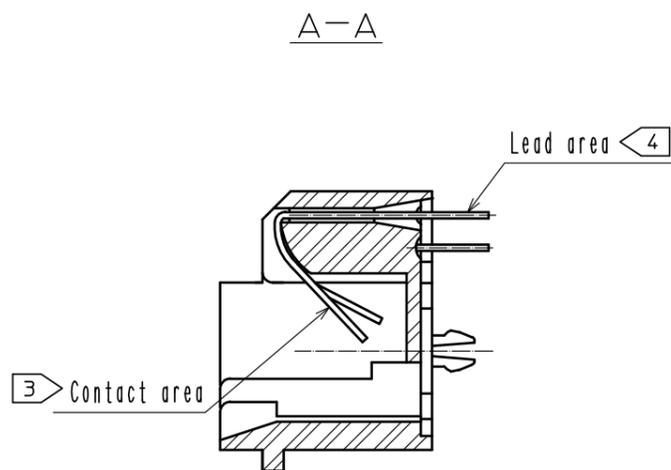
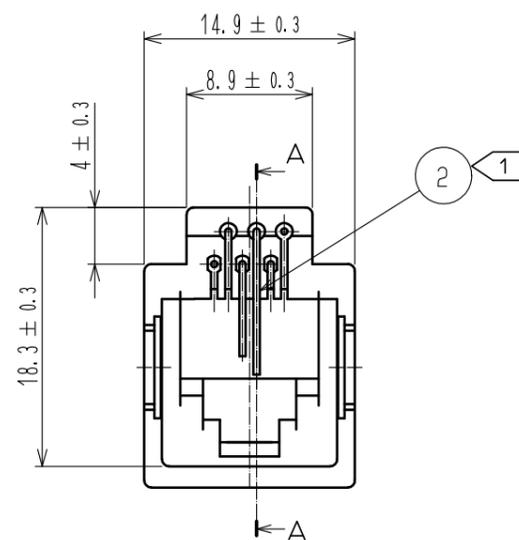


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

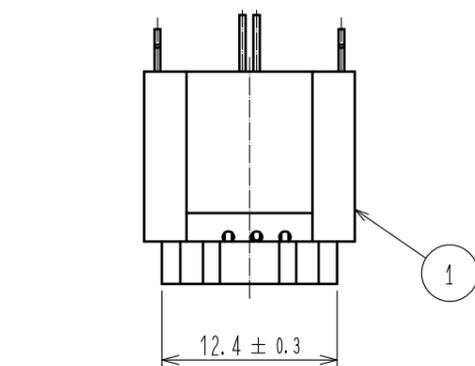

Notes ① It shall be plated with Nickel except for the gold plating area.
② The dimensions in parentheses are for reference.

2	Phosphor bronze	③ Contact area : Selective Gold plating 1.27 μm min. ④ Lead : Gold plating 0.03 μm min. Under : Nickel plating 1.27 μm min.						
1	PBT	Black, UL94V-0	3	Copper alloy	Tin plating 1 μm min.			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	18.06.12	DRAWING NO.	EDC-025816-50-08			
		CHECKED : RI. TAKAYASU	18.06.12	PART NO.	TM3RA1-62(50)			
		DESIGNED : MO. SHIMOYAMA	18.06.12	CODE NO.	CL222-1375-2-50			
		DRAWN : S.J. SATO	18.06.12		①/1			