



Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





Contact mounting  
A-A



PC board pattern

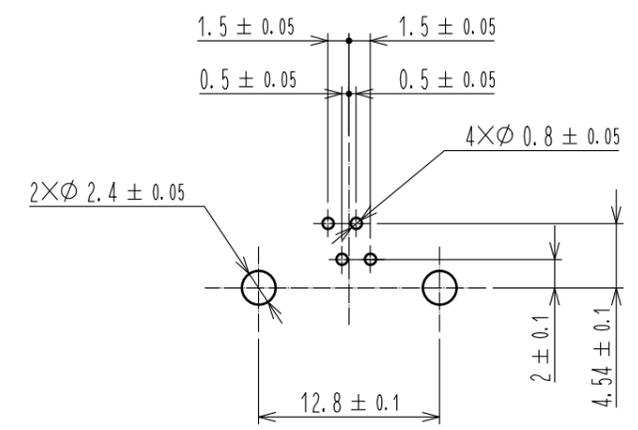

Notes ① Dimensions are viewed from the connector mounting side on PCB.  
 ② PC Board thickness:  $t = 1.6$  mm.

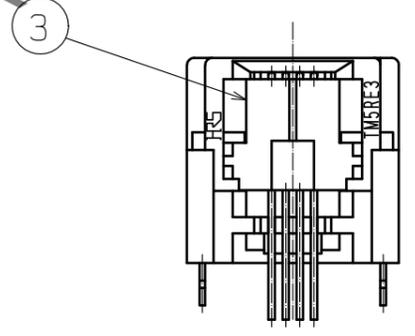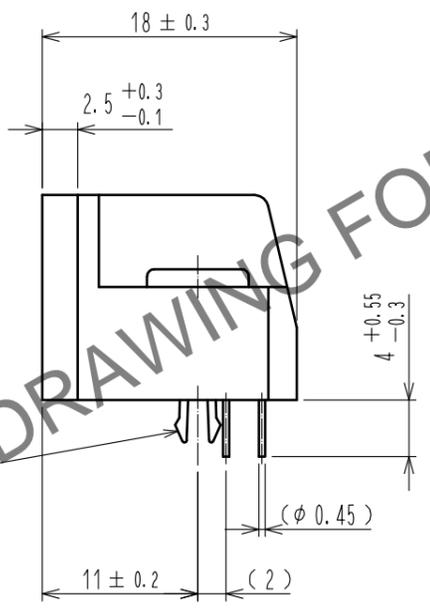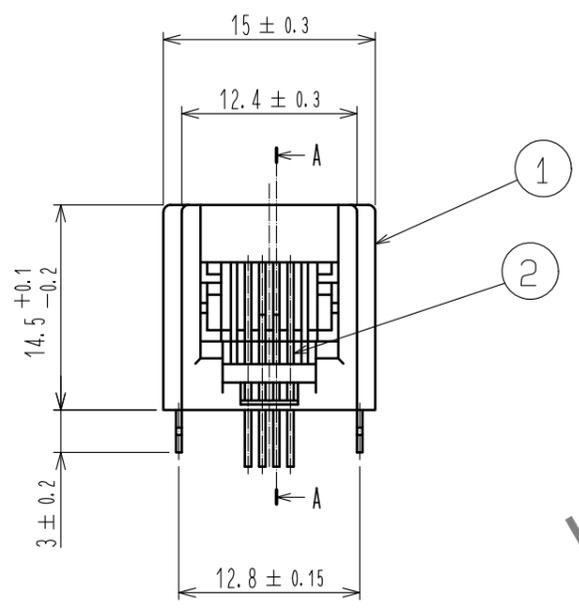

Note The dimensions in parentheses are for reference.

2	Phosphor bronze	Contact area : Gold plating 1.27μm min. Lead : Gold plating 0.03μm min. Under : Nickel plating 1.27μm min.	4	Phosphor bronze	Tin plating 1μm min/			
1	PBT	Dark gray . UL94V-0	3	PBT	Black . UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU 18.06.12	DRAWING NO. EDC-026155-20-01					
		CHECKED : RI. TAKAYASU 18.06.12	PART NO. TM5RE3-64(20)					
		DESIGNED : MO. SHIMOYAMA 18.06.12	CODE NO. CL222-1427-4-20					
		DRAWN : SJ. SATO 18.06.12						